



TOM MBOYA UNIVERSITY
KNOWLEDGE FOR SUSTAINABLE INNOVATION ENTERPRISE
OFFICE OF THE VICE-CHANCELLOR

Tel: +254746401703/0746401706

Email: vc@tmu.ac.ke

P. O. Box 199 - 40300

HOMA-BAY

REF: TMU/OT/01/2024/2025/ADD.2

DATE: 06th September, 2024

RE: ADDENDUM NO.2 TO THE TENDER TMU/OT/01/2024/2025 FOR SUPPLY, DELIVERY AND INSTALLATION OF AUDITORIUM CHAIRS

Please refer to the above tender.

We make the following clarifications and amendments to the Principal Tender Document (hereinafter abbreviated as the PTD) and Addendum No.1 (hereinafter abbreviated as the ADD.1) for the Supply, Delivery and Installation of Auditorium Chairs.

1. CLARIFICATION 1- ADD.1

- TECHNICAL SPECIFICATIONS

A. PREVIOUS DESCRIPTION


Summary of Technical Specifications: The Goods and Related Services shall comply with following Technical Specifications and Standards:

Item No	Name of Goods or Related Service	Technical Specifications and Standards	Compliance to Technical Specifications (YES/NO)
1.	ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR - HDPE OR EQUIVALENT (AS APPROVED)	<u>SPECIFICATIONS</u> i. DETAILED SIZES Center distance :520mm; Seat height: 450mm. Whole chair depth :855mm; Total height of the chair G.L to the top 1000mm; Writing pad height: 650mm. (950mm from ground level). ii. WRITING PAD The panel is made of MDF double-sided fire-proof board (the color of the panel is beech),	


		<p>wood embossed surface, (Writing pad Mdf double side board to have a curve at the front to conform with the backrest shape and to allow easy of folding and sliding in and out). the left and right sides of the desktop are covered by aluminum alloy, and the return mechanism is made of hinge track, which can shrink freely. (Desktop return mechanism Desktop to prevent people from colliding with desktop corners and injuries, safe and firm. The height of the writing pad 650mm. (950mm from ground level to allow for enough clearance once seated.</p> <p>iii. FEET Aluminum alloy die-casting molding, no burrs, no welding, surface for anti-oxidation treatment after high temperature spray treatment strong adhesion, impact resistance, corrosion resistance, no rust, do not fade, durable, foot height: 1000mm, armrest height: 655mm foot width: 50mm, foot width :430mm. Height from foot bottom to seat shaft: 390mm. Fully enclosed anchor screw hole with built-in ground burst screws. The length of the sole of the foot is 355mm, the distance between the mounting holes of the foot is not less than 308mm, and the fixing screws can be specified in length according to the ground conditions, and the outer cover is 2 screw covers. Dust proof, safe, beautiful.</p> <p>iv. BACKREST Size: High 545mm wide 505mm thick 40mm, (the elongated back in proportion to the height and the structural feature of the chair) high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, ergonomic design, moisture-proof, durable, do not fade.</p> <p>v. SEAT PART Size: Length 420mm wide 440mm thick 30mm, using high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, and aluminum alloy die-casting molding Angle code adopts penetration connection, using M8 cylindrical head hexagonal screws 2 / Angle code, the overall arc and curve are ergonomic design. High strength, anti-aging, durable, comfortable to sit.</p> <p>vi. BOOKSHELF High quality $\phi 5 \times \phi 3$mm cold drawn steel wire is used, and the surface is treated by electrostatic spraying. The inner cavity of the book basket dimension 40mm to facilitate the collection of books. Four M6 screws are used to connect the left and right sides of the aluminum alloy feet to ensure that they are firm and not loose.</p> <p>vii. STRUCTURE 13mm thick aluminum alloy integrated die-casting corner code, no burrs, no welding, anti-pinch function, the corner code surface for anti-oxidation treatment, high temperature spray treatment. Mute handling powerful response mechanism, durable</p> <p>viii. INSTALLATION OF ALL CHAIRS SUPPLIED Includes installation, fixing with appropriate materials, cutting or chasing floors make good any affected area during installation; all to the approval and satisfaction of the Client</p>	
--	--	---	--

B. NEW DESCRIPTION


Summary of Technical Specifications: The Goods and Related Services shall comply with following Technical Specifications and Standards:

Item No	Name of Goods or Related Service	Technical Specifications and Standards	PHOTO	Compliance to Technical Specifications (YES/NO)
1.	<p>MIDDLE ROW SEAT <i>ALUMINIUM FRAME</i> <i>WITH ARM</i> <i>AUDITORIUM CHAIR -</i> <i>HDPE OR EQUIVALENT</i> <i>(AS APPROVED)</i></p>	<p><u>SPECIFICATIONS</u></p> <p>i. DETAILED SIZES Center distance :520mm; Seat height: 450mm. Whole chair depth :855mm; Total height of the chair G.L to the top 1100mm; Writing pad height: 650mm. (950mm from ground level)</p> <p>ii. WRITING PAD The panel is made of MDF double-sided fire-proof board (the color of the panel is beech), wood embossed surface, (Writing pad Mdf double side board to have a curvature at the front to conform with the backrest shape and to allow easy of folding and sliding in and out). the left and right sides of the desktop are covered by aluminum alloy, and the return mechanism is made of hinge track, which can shrink freely. (Desktop return mechanism Desktop to prevent people from colliding with desktop corners and injuries, safe and firm. The height of the writing pad 650mm. (950mm from ground level to allow for enough clearance once seated.</p> <p>iii. FEET Aluminum alloy die-casting molding, no burrs, no welding, surface for anti-oxidation treatment after high temperature spray treatment strong adhesion, impact resistance, corrosion resistance, no rust, do not fade, durable, foot height: 1100mm, armrest height: 655mm foot width: 50mm, foot width :430mm. Height from foot bottom to seat shaft: 390mm. Fully enclosed anchor screw hole with built-in ground burst screws. The length of the sole of the foot is 355mm, the distance between the mounting holes of the foot is not less than 308mm, and the fixing screws can be specified in length according to the ground conditions, and the outer cover is 2 screw covers. Dust-proof, safe, beautiful.</p>		

		<p>iv. BACKREST Size: High 645mm wide 505mm thick 40mm, (the elongated back in proportion to the height and the structural feature of the chair) high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, ergonomic design, moisture-proof, durable, do not fade.</p> <p>v. SEAT PART Size: Length 420mm wide 440mm thick 30mm, using high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, and aluminum alloy die-casting molding Angle code adopts penetration connection, using M8 cylindrical head hexagonal screws 2 / Angle code, the overall arc and curve are ergonomic design. High strength, anti-aging, durable, comfortable to sit.</p> <p>vi. BOOKSHLEF High quality $\phi 5 \times \phi 3$mm cold drawn steel wire is used, and the surface is treated by electrostatic spraying. The inner cavity of the book basket dimension 40mm to facilitate the collection of books. Four M6 screws are used to connect the left and right sides of the aluminum alloy feet to ensure that they are firm and not loose.</p> <p>vii. STRUCTURE 13mm thick aluminum alloy integrated die-casting corner code, no burrs, no welding, anti-pinch function, the corner code surface for anti-oxidation treatment, high temperature spray treatment. Mute handling powerful response mechanism, durable.</p> <p>viii. INSTALLATION OF ALL CHAIRS SUPPLIED Includes installation, fixing with appropriate materials, cutting or chasing floors make good any affected area during installation; all to the approval and satisfaction of the Client</p>		
--	--	---	--	--

Item No	Name of Goods or Related Service	Technical Specifications and Standards	PHOTO	Compliance to Technical Specifications (YES/NO)
2.	BACK ROW SEAT <i>ALUMINIUM FRAME</i> <i>WITH ARM</i> <i>AUDITORIUM CHAIR -</i> <i>HDPE OR EQUIVALENT</i> <i>(AS APPROVED)</i>	<p><u>SPECIFICATIONS</u></p> <p>i. DETAILED SIZES Centre distance:520mm, Seat height: 450mm. Total height of the chair G.L to the top 1100mm</p> <p>ii. WRITING PAD NONE</p> <p>iii. FEET Aluminum alloy die-casting molding, no burrs, no welding, surface for anti-oxidation treatment after high temperature spray treatment strong adhesion, impact resistance, corrosion resistance, no rust, do not fade, durable, foot height: 1100mm, armrest height: 655mm foot width: 50mm, foot width :430mm. Height from foot bottom to seat shaft: 390mm. Fully enclosed anchor screw hole with built-in ground burst screws. The length of the sole of the foot is 355mm, the distance between the mounting holes of the foot is not less than 308mm, and the fixing screws can be specified in length according to the ground conditions, and the outer cover is 2 screw covers</p> <p>iv. BACKREST High 645mm wide 505mm thick 40mm, (the elongated back in proportion to the height and the structural feature of the chair) high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, ergonomic design, moisture-proof, durable, do not fade.</p> <p>v. SEAT PART SIZE Length 420mm wide 440mm thick 30mm, using high density polyethylene (HDPE) through a large hollow blow molding machine blow molding, and aluminum alloy die-casting molding Angle code adopts penetration connection, using M8 cylindrical head hexagonal screws 2 / Angle code, the overall arc and curve are ergonomic design. High strength, anti-aging, durable, comfortable to sit</p> <p>vi. BOOKSHLEF NONE</p> <p>vii. STRUCTURE</p>		

		<p>13mm thick aluminum alloy integrated die-casting corner code, no burrs, no welding, anti-pinch function, the corner code surface for anti-oxidation treatment, high temperature spray treatment. Mute handling powerful response mechanism, durable</p> <p>viii. INSTALLATION OF ALL CHAIRS SUPPLIED</p> <p>Includes installation, fixing with appropriate materials, cutting or chasing floors make good any affected area during installation; all to the approval and satisfaction of the Client</p>		
--	--	---	--	--

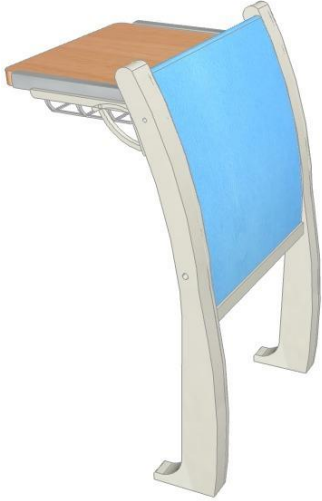Item No	Name of Goods or Related Service	Technical Specifications and Standards	PHOTO	Compliance to Technical Specifications (YES/NO)
3.	<p>FRONT TABLE ROW ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR - HDPE OR EQUIVALENT (AS APPROVED)</p>	<p><u>SPECIFICATIONS</u></p> <p>i. DETAILED SIZES DETAILED Sizes: Center distance:520mm, Total height of the stand G.L to the top 1100mm. Writing pad height: 650mm (950mm from ground level)</p> <p>ii. WRITING PAD The panel is made of MDF double-sided fire-proof board (the color of the panel is beech), wood embossed surface,(Writing pad Mdf double side board to have a curvature at the front to conform with the backrest shape and to allow easy of folding and sliding in and out). the left and right sides of the desktop are covered by aluminum alloy, and the return mechanism is made of hinge track, which can shrink freely. (Desktop return mechanism Desktop to prevent people from colliding with desktop corners and injuries, safe and firm.The height of the writing pad 650mm.(950mm from ground level to allow for enough clearance once seated).</p> <p>iii. FEET Aluminum alloy die-casting molding, no burrs, no welding, surface for anti-oxidation treatment after high temperature spray treatment strong adhesion, impact resistance, corrosion resistance, no rust, do not fade, durable, foot height: 1100mm, foot width: 50mm, foot width :180mm. Fully enclosed anchor screw hole with built-in ground burst screws. The length of the sole of the foot is 355mm, the distance between the mounting holes of the foot is not less than 108mm, and the fixing screws can be specified in length according to</p>		


		<p>the ground conditions, and the outer cover is 2 screw covers.</p> <p>iv. BACKREST NONE</p> <p>v. SEAT PART NONE</p> <p>vi. BOOKSHLEF High quality $\phi 5 \times \phi 3$mm cold drawn steel wire is used, and the surface is treated by electrostatic spraying. The inner cavity of the book basket dimension 40mm to facilitate the collection of books. Four M6 screws are used to connect the left and right sides of the aluminum alloy feet to ensure that they are firm and not loose.</p> <p>vii. STRUCTURE 13mm thick aluminum alloy integrated die-casting corner code, no burrs, no welding, anti-pinch function, the corner code surface for anti-oxidation treatment, high temperature spray treatment. Mute handling powerful response mechanism, durable.</p> <p>viii. INSTALLATION OF ALL CHAIRS SUPPLIED Includes installation, fixing with appropriate materials, cutting or chasing floors make good any affected area during installation; all to the approval and satisfaction of the Client</p>		
--	--	---	--	--

2. CLARIFICATION 2- ADD.1

- DRAWINGS

A. PREVIOUS DESCRIPTION

4.1 ALUMINUM FRAME WITH ARM(HDPE)

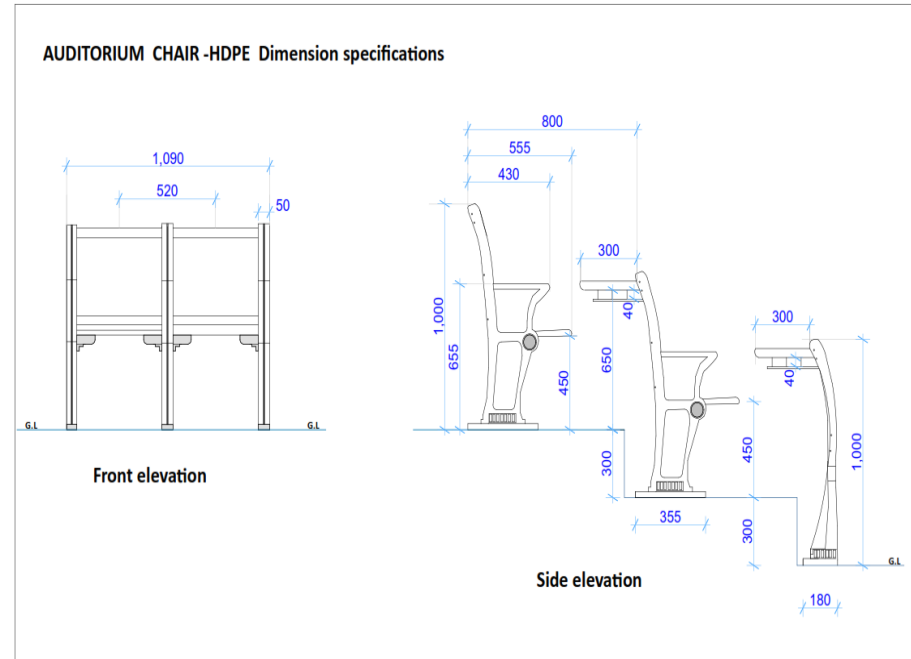


B. NEW DESCRIPTION


4.1 ALUMINUM FRAME WITH ARM(HDPE)



AUDITORIUM CHAIR -HDPE Dimension specifications

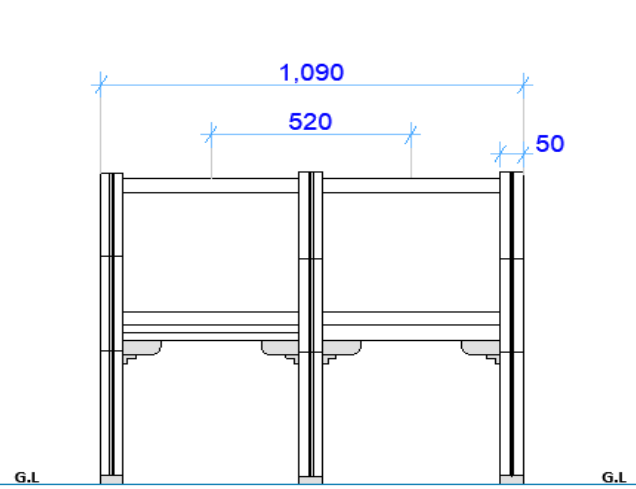

Front elevation

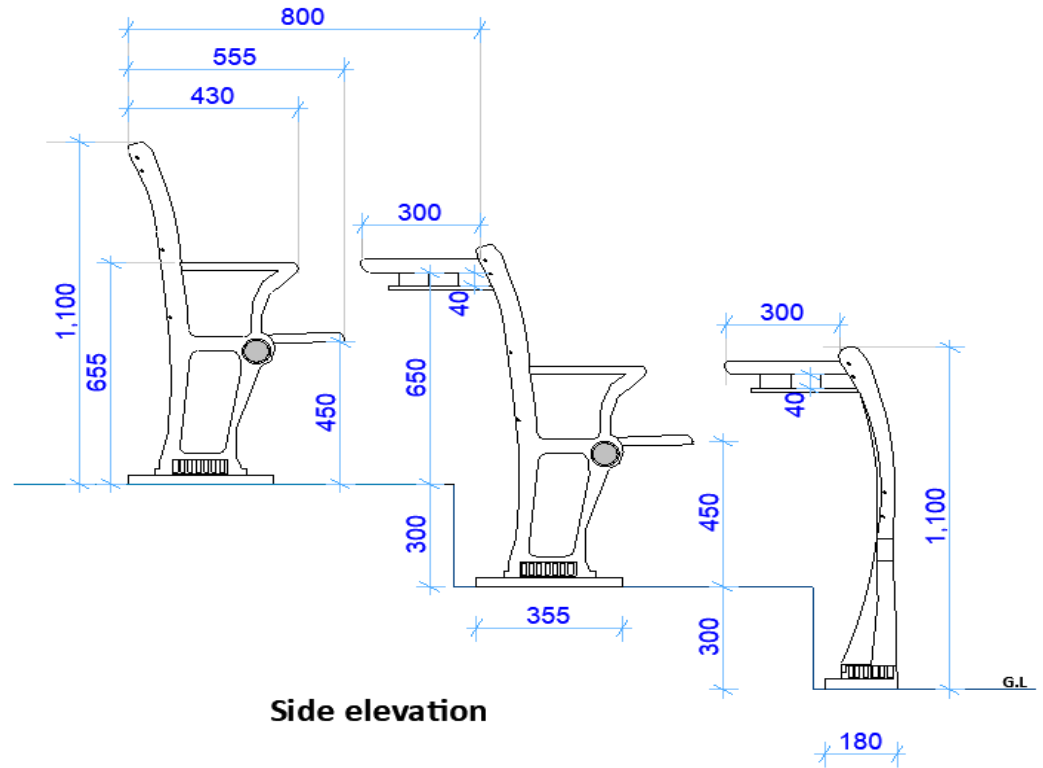

Side elevation

3. CLARIFICATION 3- PTD

SECTION IV - TENDERING FORMS

- Price Schedule Forms

A. PREVIOUS DESCRIPTION

Price Schedule: As applicable

(Group C Tenders, goods to be imported)								Date: _____
Currencies in accordance with ITT 15								ITT No: _____
								Alternative No: _____
								Page N° _____ of _____
1	2	3	4	5	6	7	8	9
Line Item N°	Description of Goods	Country of Origin	Delivery Date as defined by Incoterms	Quantity and physical unit	Unit price CIP <i>[insert place of destination]</i> in accordance with ITT 14.8(b)(i)	CIP Price per line item (Col. 5x6)	Price per line item for inland transportation and other services required in Kenya to convey the Goods to their final destination specified in TDS	Total Price per Line item (Col. 7+8)
<i>[insert number of the item]</i>	<i>[insert name of good]</i>	<i>[insert country of origin of the Good]</i>	<i>[insert quoted Delivery Date]</i>	<i>[insert number of units to be supplied and name of the physical unit]</i>	<i>[insert unit price CIP per unit]</i>	<i>[insert total CIP price per line item]</i>	<i>[insert the corresponding price per line item]</i>	<i>[insert total price of the line item]</i>
1	ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE			1330 PCs				
Total Price								

B. NEW DESCRIPTION

Price Schedule: As applicable in the document

(Group C Tenders, goods to be imported)						Date: _____		
Currencies in accordance with ITT 15						ITT No: _____		
1	2	3	4	5	6	7	8	9
Line Item N°	Description of Goods	Country of Origin	Delivery Date as defined by Incoterms	Quantity and physical unit	Unit price CIP <i>[insert place of destination]</i> in accordance with ITT 14.8(b)(i)	CIP Price per line item (Col. 5x6)	Price per line item for inland transportation and other services required in Kenya to convey the Goods to their final destination specified in TDS	Total Price per Line item (Col. 7+8)
1	MIDDLE ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>			1231(PCS)				
2.	BACK ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>			99(PCS)				

3.	FRONT TABLE ROW <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>			99(PCS)				
4.	0.03% capacity building levy			LOT				
5.	VAT			LOT				
							Total Price	

PLEASE TAKE NOTE OF THE FOLLOWING:

Prices quoted should be inclusive of Capacity Building Levy (calculated as 0.03% of the contract price before VAT); all applicable taxes including VAT, transportation cost and any other applicable cost.

4. CLARIFICATION 4- PTD

- PART 2: SUPPLY REQUIREMENTS
- Section V - Schedule of Requirements

A. PREVIOUS DESCRIPTION

1. List of Goods and Delivery Schedule

Line Item N°	Description of Goods	Quantity	Physical unit	Final Destination as specified in TDS	Delivery (as per Incoterms) Date		
					Earliest Delivery Date	Latest Delivery Date	Tenderer's offered Delivery date [to be provided by the tenderer]
<i>[insert item No]</i>	<i>[insert description of Goods]</i>	<i>[insert quantity of item to be supplied]</i>	<i>[insert physical unit for the quantity]</i>	<i>[insert place of Delivery]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>
1	ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE	PCS	1330	MAIN CAMPUS	IMMEDIATELY AFTER LPO/CONTRACT SIGNING	30 DAYS	

B. NEW DESCRIPTION

1. List of Goods and Delivery Schedule

Line Item N°	Description of Goods	Quantity	Physical unit	Final Destination as specified in TDS	Delivery (as per Incoterms) Date		
					Earliest Delivery Date	Latest Delivery Date	Tenderer's offered Delivery date [to be provided by the tenderer]
<i>[insert item No]</i>	<i>[insert description of Goods]</i>	<i>[insert quantity of item to be supplied]</i>	<i>[insert physical unit for the quantity]</i>	<i>[insert place of Delivery]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>	<i>[insert the number of days following the date of effectiveness the Contract]</i>
1	MIDDLE ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	PCS	1231	MAIN CAMPUS	IMMEDIATELY AFTER LPO/CONTRACT SIGNING	30 DAYS	
2.	BACK ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	PCS	99	MAIN CAMPUS	IMMEDIATELY AFTER LPO/CONTRACT SIGNING	30 DAYS	
3.	FRONT TABLE ROW <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	PCS	99	MAIN CAMPUS	IMMEDIATELY AFTER LPO/CONTRACT SIGNING	30 DAYS	

5. CLARIFICATION 5- PTD

- PART 2: SUPPLY REQUIREMENTS
- Section V - Schedule of Requirements

A. PREVIOUS DESCRIPTION

2. List of Related Services and Completion Schedule

Service	Description of Service	Quantity ¹	Physical Unit	Place where Services shall be performed	Final Completion Date(s) of Services
<i>[insert Service No]</i>	<i>[insert description of Related Services]</i>	<i>[insert quantity of items to be supplied]</i>	<i>[insert physical unit for the items]</i>	<i>[insert name of the Place]</i>	<i>[insert required Completion Date(s)]</i>
1	ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE	1330	PCS	TMU MAIN CAMPUS	

¹If applicable

B. NEW DESCRIPTION

2.List of Related Services and Completion Schedule

Service	Description of Service	Quantity ¹	Physical Unit	Place where Services shall be performed	Final Completion Date(s) of Services
<i>[insert Service No]</i>	<i>[insert description of Related Services]</i>	<i>[insert quantity of items to be supplied]</i>	<i>[insert physical unit for the items]</i>	<i>[insert name of the Place]</i>	<i>[insert required Completion Date(s)]</i>

1	MIDDLE ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	1231	PCS	TMU MAIN CAMPUS	
2.	BACK ROW SEAT <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	99	PCS	TMU MAIN CAMPUS	
3.	FRONT TABLE ROW <i>ALUMINIUM FRAME WITH ARM AUDITORIUM CHAIR -HDPE OR EQUIVALENT (AS APPROVED)</i>	99	PCS	TMU MAIN CAMPUS	

¹If applicable

6. CLARIFICATION 6- ADD.1

- SUBMISSION AND OPENING OF TENDERS

A. PREVIOUS DESCRIPTION

B. NEW DESCRIPTION

Submission and opening of Tenders: Cover page, Invitation to Tender Clause 9 and Section II - Tender Data Sheet (TDS). Closing date is Monday 16th September 2024 at 10:00 a.m	Submission and opening of Tenders: Cover page, Invitation to Tender Clause 9 and Section II - Tender Data Sheet (TDS) Closing date is Monday 16th September 2024 at 10:00 a.m. Tenders must be received on or before Monday 16th September, 2024 at 10:00 a.m.
--	---

Except as clarified herein, all the other terms and conditions of the tender remain as is and are unchanged.

VICE-CHANCELLOR